

# RYWDB00

Industrial grade 802.11a/b/g/n 2.4GHz & 5GHz 802.11j 1T1R Wi-Fi,  
dual-mode Bluetooth 5 mini PCIe card

Datasheet



## PRODUCT DESCRIPTION

The RYWDB00 uses Silicon Labs RS9116N-DB00-CC0 core and provides a comprehensive multi-protocol wireless connectivity solution including 802.11 a/b/g/n (2.4 GHz & 5 GHz), 802.11j, dual-mode Bluetooth® 5

## FEATURES

### Wi-Fi

- Compliant to single-spatial stream IEEE 802.11 a/b/g/n, 802.11j (hosted mode) with dual band (2.4 and 5 GHz) support
- Support for 20 MHz channel bandwidth
- Transmit power up to +18 dBm with integrated PA
- Receive sensitivity as low as -96 dBm
- Application data throughput up to 50 Mbps (Hosted Mode) in 802.11n with 20 MHz bandwidth
- Standard mini PCIe and plug PCB design.
- Temperature range: -40 to +85°C.
- Mini PCIe Signal Type USB2.0 HS.


### Bluetooth

- Compliant to dual-mode Bluetooth 5
- Transmit power up to +17 dBm with integrated PA
- Receive sensitivity: LE: -92 dBm, LR 125 Kbps: - 103 dBm
- Data rates: 125 kbps, 500 kbps, 1 Mbps, 2 Mbps, 3 Mbps


### Hosted Mode

- Host drivers for Linux.
- Support for Client mode, Access point mode, Wi-Fi Direct, Concurrent client and access point mode, Enterprise Security.
- Support for concurrent Wi-Fi, dual-mode Bluetooth 5

## BLOCK DIAGRAM

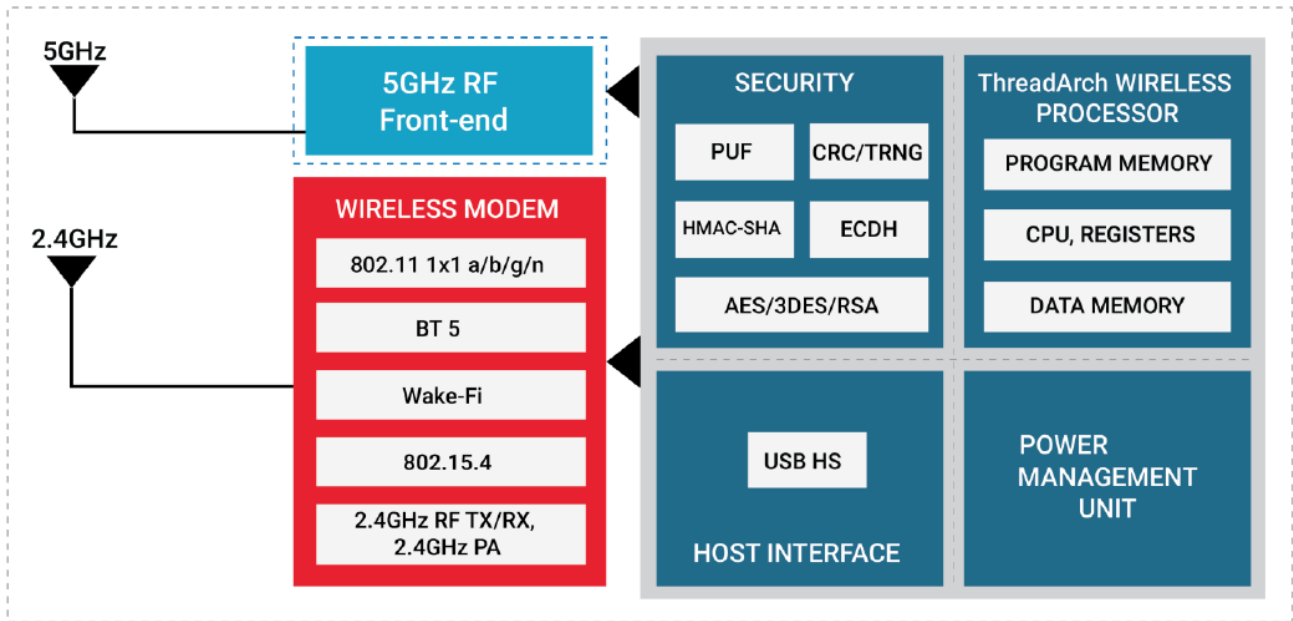

## PIN CONNECTOR

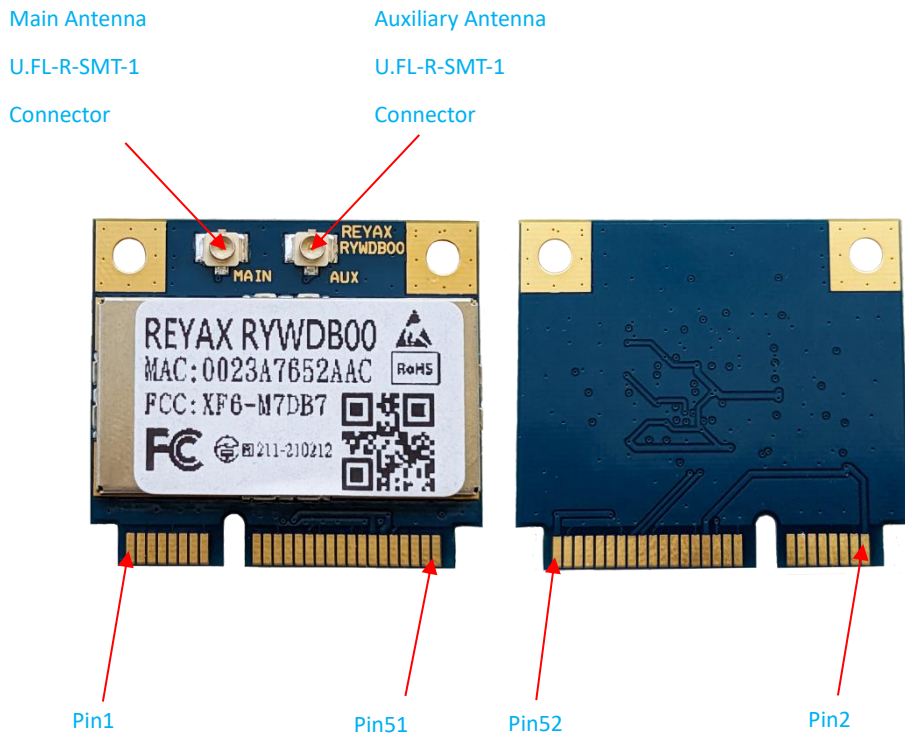

## PIN DESCRIPTION

Pin	Name	Input/Output	Description
1	NC		Not connected
2	VCC	Power	Power Input
3	NC		Not connected
4	GND		Power Ground
5	NC		Not connected
6	NC		Not connected
7	NC		Not connected
8	NC		Not connected
9	GND		Power Ground
10	NC		Not connected
11	NC		Not connected
12	NC		Not connected
13	NC		Not connected
14	NC		Not connected
15	GND		Power Ground
16	NC		Not connected
17	NC		Not connected
18	GND		Power Ground
19	NC		Not connected
20	NC		Not connected
21	GND		Power Ground
22	NC		Not connected
23	NC		Not connected
24	VCC	Power	Power Input
25	NC		Not connected
26	GND		Power Ground
27	GND		Power Ground
28	NC		Not connected
29	GND		Power Ground
30	NC		Not connected
31	NC		Not connected
32	NC		Not connected
33	NC		Not connected
34	GND		Power Ground

35	GND		Power Ground
36	USB_DN	Input/Output	USB Data Negative
37	GND		Power Ground
38	USB_DP	Input/Output	USB Data Positive
39	VCC	Power	Power Input
40	GND		Power Ground
41	VCC	Power	Power Input
42	NC		Not connected
43	GND		Power Ground
44	NC		Not connected
45	NC		Not connected
46	NC		Not connected
47	NC		Not connected
48	NC		Not connected
49	NC		Not connected
50	GND		Power Ground
51	NC		Not connected
52	VCC	Power	Power Input

## SPECIFICATION



Feature	Description
Wireless Protocols	IEEE 802.11b, 802.11g, 802.11n, 802.11a Bluetooth 5 (2.1+EDR, LE, LE 2 Mbps, Long Range (125/500 Kbps))
Operational Modes Supported	Wi-Fi Access Point with support for up to 16 clients Wi-Fi Client Wi-Fi Direct® Wi-Fi Client + Bluetooth Classic (EDR v 2.1)
WLAN Bandwidth	WLAN Bandwidth
WLAN Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g/a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS0 to MCS7
WLAN Operating Frequency Range	2412 MHz – 2484 MHz 4.9 GHz – 5.975 GHz
WLAN Modulation	OFDM with BPSK, QPSK, 16-QAM, and 64-QAM 802.11b with CCK and DSSS
Maximum WLAN Transmit Power	2.4 GHz: 18 dBm, 5 GHz: 13.5 dBm
Minimum WLAN Receive Sensitivity	2.4 GHz: -96 dBm, 5 GHz: -89 dBm
Bluetooth Data Rates	1, 2, 3 Mbps, 125 Kbps and 500 Kbps
Bluetooth Operating Frequency	2.402 GHz - 2.480 GHz
Bluetooth Channel Spacing	BR, EDR, LE 1 Mbps, LR - 1 MHz LE 2 Mbps - 2 MHz
Bluetooth Modulation	GFSK, DQPSK, 8DPSK
Maximum Bluetooth Transmit Power	17 dBm (Class-1)
Minimum Bluetooth Receive Sensitivity	LE: -92 dBm, LR 125 Kbps: -103 dBm
Wireless Security Features	WPA/WPA2-Personal WPA/WPA2 Enterprise for Client EAP-TLS EAP-FAST EAP-TTLS PEAP-MSCHAP-v2

Advanced Security Features	<p>PUF Based Security</p> <p>AES 128/256 bit</p> <p>RSA</p> <p>SHA, SHA256, SHA384</p>
Application throughputs	Up to 50 Mbps (As measured in ideal environment. Note that throughput degrades in the presence of interference and reduces with range)
Operating Temperature Range	-40 Ć to +85 Ć
Supply Voltages	+3.1V to +3.5V
Supply Current	450mA
WLAN Features	<ul style="list-style-type: none"> <li>• Dynamic selection of fragment threshold, data rate, and antenna depending on the channel statistics</li> <li>• Hardware accelerators for WEP 64/128-bit, TKIP, AES and WPS</li> <li>• Support for WMM</li> <li>• Support for AMPDU Aggregation/De-aggregation and AMSDU De-aggregation</li> </ul>
Bluetooth Features	<ul style="list-style-type: none"> <li>• Supports EDR+2.1, 4.0, 4.1, 4.2 and 5.0.</li> <li>• Supports LE 1 Mbps and 2 Mbps and Long Range modes.</li> <li>• Supports Classic mode piconet with seven active slaves. (two slaves in current release)</li> <li>• Supports Low Energy mode with six active slaves.</li> <li>• Bluetooth security features: Authentication, Pairing and Encryption.</li> <li>• Supports low power connection states such as sniff (with selectable sniff intervals).</li> <li>• Adaptive Frequency Hopping (AFH), Interlaced scanning, Quality of Service</li> <li>• Proprietary FEC for DQPSK and 8-PSK modes</li> <li>• Provides finer granularity of range vs. throughput control.</li> <li>• BR/EDR secure connections, Train Nudging, Generalized interlaced scan, Low duty cycle directed advertizing, Piconet clock adjustment, WMS coexistence, Slot availability mask (SAM)</li> <li>• Dual mode support, 32-bit UUID in LE, LE privacy, LE ping, LE L2CAP connection oriented channel, Connectionless slave broadcast, Fast advertising interval, LE data packet extension, LE secure connections, Link layer privacy, LE advertising</li> </ul>

	extensions, LE channel selection algorithm2, high duty cycle non-connectable advertising.
Bluetooth Profiles	GAP, GATT, SPP, SDP, SMP, L2CAP, RFCOMM
Weight	4g



## DIMENSIONS

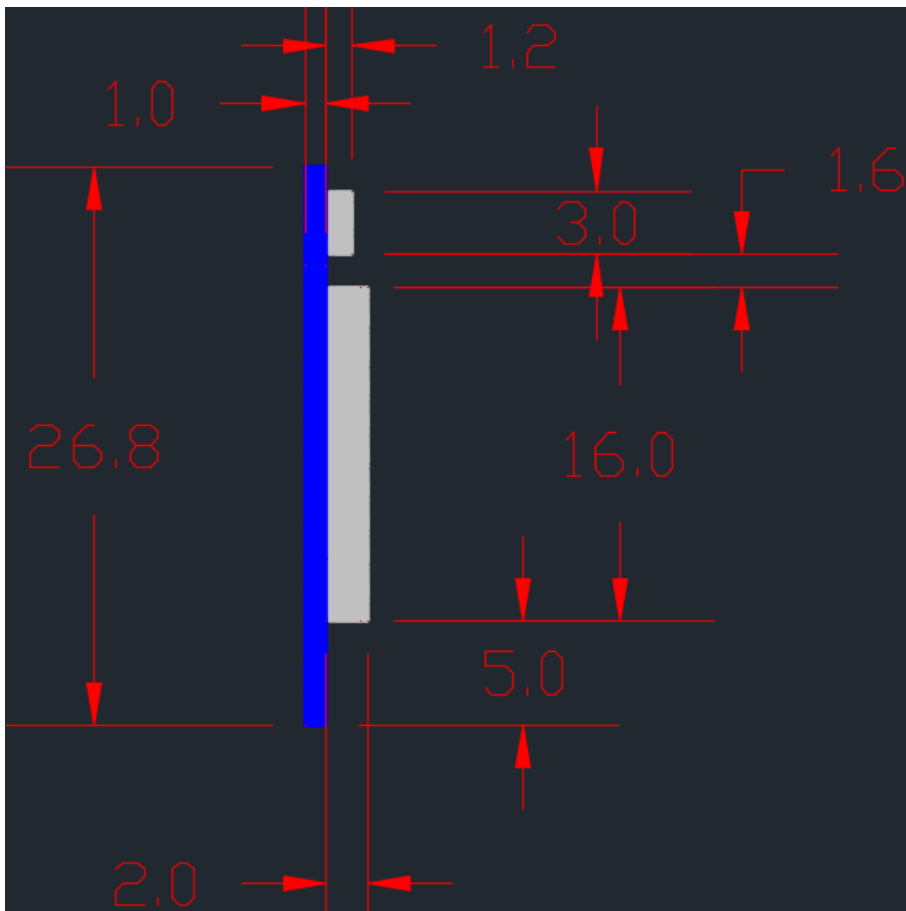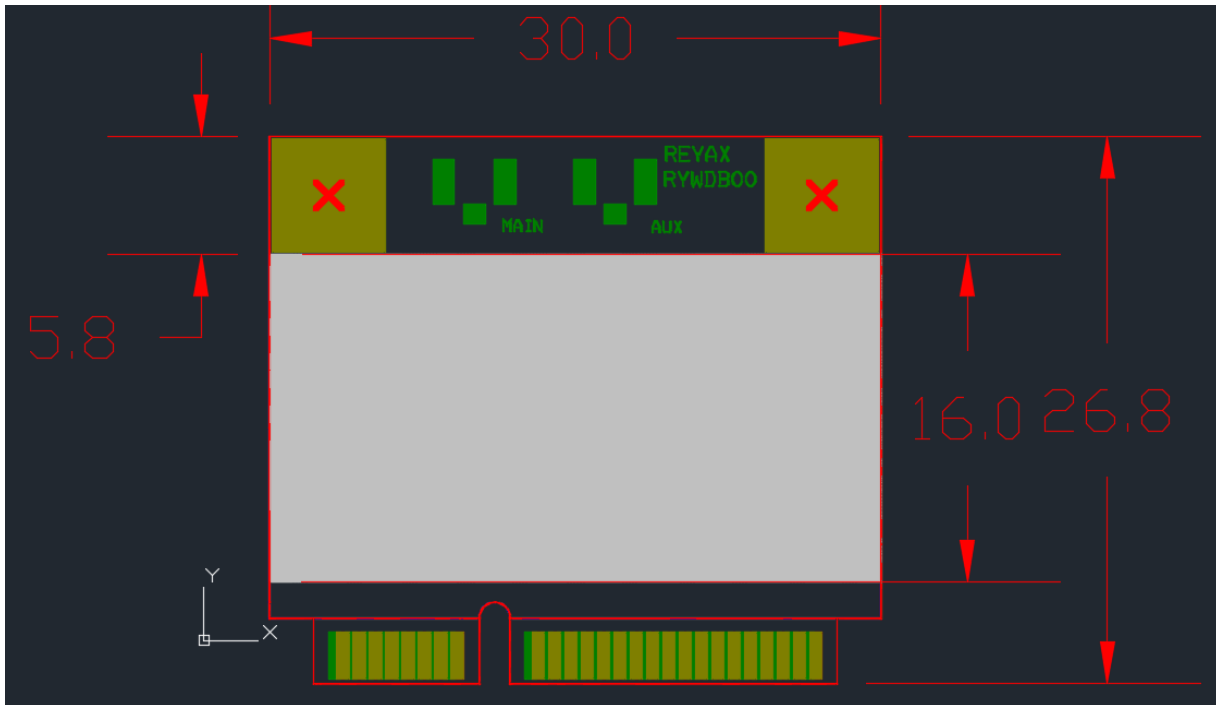

unit: mm Tolerance :  $\pm 0.2\text{mm}$

### FCC Statement:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### LABEL OF THE END PRODUCT:

The final end product must be labeled in a visible area with the following "Contains TX FCC ID : XF6-M7DB7". If the size of the end product is larger than 8x10cm, then the following FCC part 15.19 statement has to also be available on the label: This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.



### TELEC Statement:

Telefication, operating as Conformity Assessment Body (CAB ID Number:211) with respect to Japan, declares that the M7DB complies with Technical Regulations Conformity Certification of specified Radio equipment (ordinance of MPT No 37,1981)

- The validity of this Certificate is limited to products, which are equal to the one examined in the type-examination
- when the manufacturer (or holder of this certificate) is placing the product on the Japanese market, the product must be affixed with the following Specified Radio Equipment marking R211-210212 for M7DB.

## Qualified Antenna Types

This device has been designed to operate with the antennas listed below. Antennas not included in this list or having a gain greater than listed gains in each region are strictly prohibited for use with this device. The required antenna impedance is 50 ohms. Any antenna that is of the same type and of equal or less directional gain can be used without a need for retesting. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that permitted for successful communication. Using an antenna of a different type or gain more than certified gain will require additional testing.

Brand	Antenna Model	Antenna Type	Gain		Qualified Region
			2.4 GHz	5 GHz	
Taoglas	GW.71.5153	Dipole Antenna	3.8 dBi (Bent) 3.3 dBi (Straight)	5.5 dBi (Bent) 4.9 dBi (Straight)	FCC/IC, CE, TELEC, UKCA
Smarteq	4211613980	PIFA	0 dBi	2.0 dBi	FCC/IC, CE, TELEC, UKCA
Inside WLAN	PRO-IS-299	Dipole	2.5 dBi	1.6 dBi	FCC/IC, CE, TELEC, UKCA
Joinsoon Electronics Mfg. Co., Ltd	MARS-31A8 WiFi Antenna	PIFA	2.0 dBi	2.0 dBi	FCC/IC, CE, TELEC, UKCA



**E-mail:** [sales@reyax.com](mailto:sales@reyax.com)

**Website:** <https://reyax.com>